PI4000

DVI Single Link Cable

from 7,50m Length

Due to its high reliability, the PureInstall Series Single Link DVI Cable PI4000 is particularly suited for professional applications and installations. This series offers excellent value for money, without compromising the quality. Optimal for the connection of two DVI devices, e.g. connecting a graphics card to an DVI-enabled display with resolutions up to 1920x1200 (WUXGA).

- High Speed connection for video resolution to WUXGA (1920x1200) and FullHD (1920x1080)
- High purity tinned plated OFC copper conductor and 3-layer shielding for optimized transmission quality
- Particularly qualified for professional applications and installations

Connections	
Plug material:	PVC
Contact material:	24-Carat gold plated
Shielding:	Yes
Connector 1:	DVI-D Male (18+1pin)
Dimension connector 1:	47,7 x 37,7 x 15,8 (mm)
Connector 2:	DVI-D Male (18+1pin)
Dimension connector 2:	47,7 x 37,7 x 15,8 (mm)

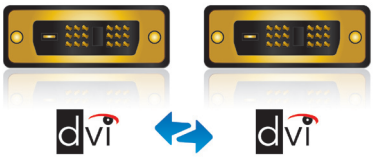

Cable		
Type:	Round cable	
Length:	7,50m | 10,0m | 15,0m | 20,0m	
Inner conductor material:	High purity tinned plated OFC Copper	A
AWG:	AWG24	
Number of shieldings:	3-layer	B
Shielding 1:	Aluminum foil (100% sealed)	
Shielding 2:	Aluminum foil (100% sealed)	
Shielding 3:	Braid (100% sealed)	
Outer sheath material:	High flexible PVC	C
Outer sheath diameter:	10,5mm	

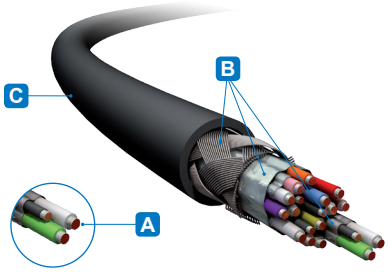

Signal transmission	
Transmission modes:	Digital video signals
Max. bandwith:	165 MHz
Max. Transfer rate:	3,72 Gbit/s
Max. resolution:	1920x1200 (WUXGA)
Supported color spaces :	8 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards:	-
Other supported standards:	HDCP, CEC, FullHD (1080i/p), HD ready (720i/p), SDTV (480i/p)

dvi SINGLE LINK

x.v.Color

Model No.	Color	Length
PI4000-075	black	7,50 m
PI4000-10	black	10,00 m
PI4000-15	black	15,00 m
PI4000-20	black	20,00 m

© PureLink GmbH 2012

PureLink GmbH | Hovesaatstr. 6 | 48432 Rheine | Germany | Tel.: 0049 (0)5971-800 299-0 | Fax: 0049 (0)5971-800 299-99 | E-mail: info@purelink.de | Internet: www.purelink.de